

## INSTALLATION INSTRUCTIONS WALL/PANEL MOUNT (TAPE) – MOUNT A




This mount is intended for permanent mounting on smooth, hard surfaces such as glass, steel, dry wall, or plastic using 3M #4956 VHB acrylic tape (Thin signs use 3M #4408 VHB Acrylic Tape). It is not recommended for selected vinyl wall coverings. It can be used with silastic bonding. Mounting surface must be clean and dry to insure good adhesion. Recommended placement of signs are 60" from floor to center of the sign and 2" from the door frame (latch side).

1. Remove backing from tape and place sign very **lightly** into position.
2. Check for level, and then apply firm pressure for good adhesion.

For signs over 144 Sq. inches, additional tape or silastic bonding (not supplied) may be required.

If there are any questions, please contact our Technical Support Department at 800.777.4310.

### Typical Application:

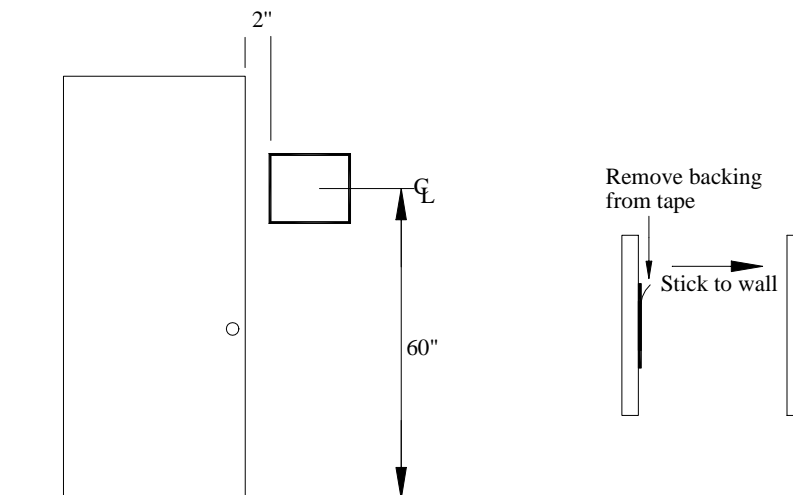

**IMPORTANT:** Prior to installation, remove all contents from box and inspect each sign for damage. Box should contain signs, hardware, and mounting instructions for each style of mount used. Surface of the sign must be handled with care. Clean with water and mild detergent.

**Customer is responsible for suitability of each mounting option. Testing is recommended prior to each use.**

Rev. 03/14/07