

INSTALLATION INSTRUCTIONS EXTERIOR SIGNS – SERIES I




Signs 40” and smaller are shipped assembled. Mount posts in ground or cement as desired.

On wider signs, assembly of sign is as follows:

1. Remove screws from post cap (2 screws per cap - #8x1/2” stainless steel screw) and remove post cap.
2. Assemble rails into post slot.
3. Replace post top caps (hand tighten screws only).
4. Mount in ground as noted above.

If there are any questions, please contact our Technical Support Department at 800.777.4310.

Typical Application:

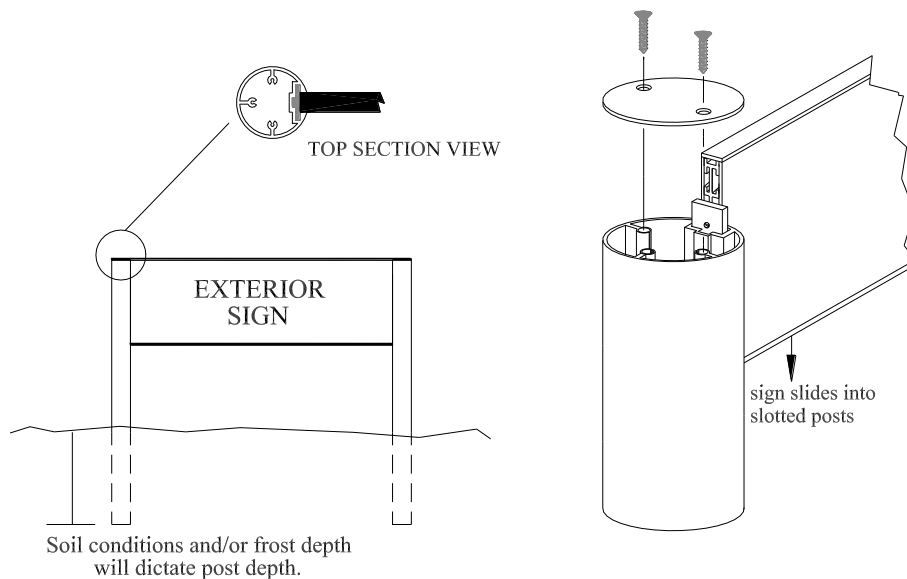

IMPORTANT: Prior to installation, remove all contents from box and inspect each sign for damage. Box should contain signs, hardware, and mounting instructions for each style of mount used. Surface of the sign must be handled with care. Clean with water and mild detergent.

Customer is responsible for suitability of each mounting option. Testing is recommended prior to each use.

Rev. 08/31/10