

This mount is intended for non-suspended ceilings or for suspended ceilings which are too high for other Ceiling Mount methods. Due to wide variety of mounting surfaces and heights the attachment method to such surfaces is to be determined by installer (hang line is not included).

- 1. Pass line through top track brackets at each end of sign. Wider signs may have more than two brackets.
- 2. Attach each end of the line to mounting surface.
- 3. Level sign by sliding line (left or right) through top track in sign until level is obtained. One piece line allows for easy leveling.


Note: Cable diameter must be 1/32" or less.

Standard series rails can be retrofitted for J-Mount.

- 1. Using center punch crimp top of rail 2 ½" in from both sides of rail.
- 2. Insert aluminum J-Mount into channel to crimped location. (one on each end of the top channel as shown on
- 3. Using center punch crimp rail locking J-Mount into location preventing it from sliding in or out of rail.
- 4. Follow above instructions to mount sign.

If there are any questions, please contact our Technical Support Department at 800.777.4310.

## **Typical Applications:**

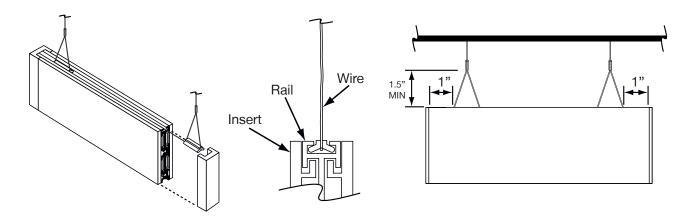

IMPORTANT: Prior to installation, remove all contents from box and inspect each sign for damage. Box should contain signs, hardware, and mounting instructions for each style of mount used. Surface of the sign must be handled with care. Clean with water and mild detergent.

Customer is responsible for suitability of each mounting option. Testing is recommended prior to each use.

Rev. 1.2019