

Installation Instructions

Wall Mount - Large Screw (D-Mount)

Applicable for the following: Slide Standard Profile (only)


This mount is intended for wall mounting on surfaces such as drywall, wood, plaster, brick or other rough and/or repairable materials for signs 1600 square inches and larger.

1. Mount hanger strip. Bottom of strip is to be 1-3/8" from the top of sign. Check to make sure the strip has been installed level. The holes on the hanger strip are 8" on center. It is recommended to mount on studs. Otherwise, anchors must be used.
2. Hang sign on hanger strip.
3. To secure the sign, remove end cap or side frame from either side of the sign. Locking end caps will require a #1 Phillips head screw driver to remove the end cap. Slide out bottom copy insert to expose the rail locking screw holes and install rail locking screws.
4. Replace copy insert(s) and end cap.

Note: All screws and anchors required for mounting this sign are included in the hardware package. Use the standard D-Mount #6 x 1-5/8" trim screws for the hanger strip and #6 x 2-1/4" for the rail locking screws.

If there are any questions, please contact our Technical Support Department at 800.777.4310.

Typical Applications:

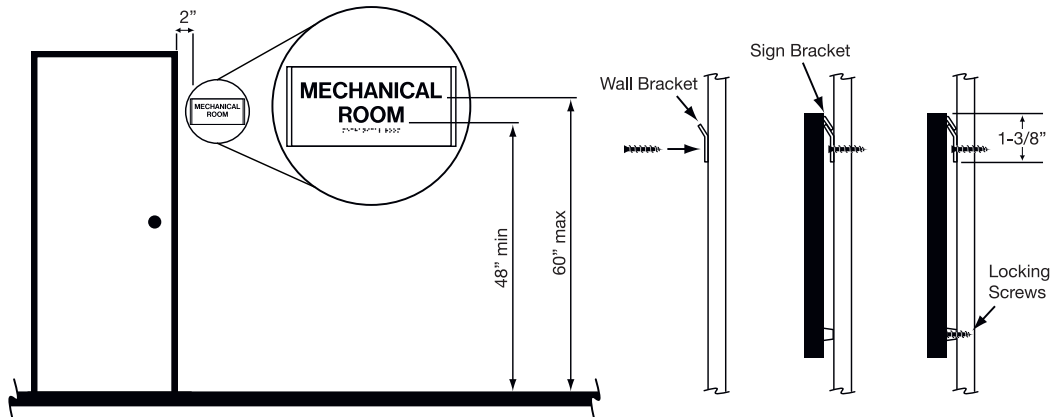

IMPORTANT: Prior to installation, remove all contents from box and inspect each sign for damage. Box should contain signs, hardware, and mounting instructions for each style of mount used. Surface of the sign must be handled with care. Bumpers are needed for proper function of end cap. Do not remove. Clean with water and mild detergent.

Customer is responsible for suitability of each mounting option. Testing is recommended prior to each use.

Rev. 1.2019