

Installation Instructions

Wall Mount - Screw (D-Mount)

Applicable for the following: Arc, FlxSign, Slide (Thin and Standard Profiles), Plaques and PlaquesPlus.

This mount is intended for wall mounting on surfaces such as drywall, wood, plaster, brick or other rough and/or repairable materials.

Note: Signs 1600 square inches and larger, reference Wall Mount – Large Screw (D Mount).

1. Remove either end cap from sign. Locking end caps will require a lock pin or #1 Phillips head screw driver to remove end cap, depending on thin or standard style sign. Slide out copy insert(s) exposing mounting holes. (Check back of sign for hole locations).
2. Using the sign or plaque as a template, mark the location of the holes with a pencil. Drill 3/16" holes in the wall at the marked location. Install anchors provided.
3. Attach sign or plaque to wall with #6 x 1-5/8" trim screws provided.


Note: Longer screws are provided for standard style signs with accent panels.

4. Replace copy insert(s) and end cap.

Note: It is very important to install signs with hardware provided by 2/90 Sign Systems. The screw head must be below rail front for inserts to function properly. (See Figure A).

If there are any questions, please contact our Technical Support Department at 800.777.4310.

Typical Applications:

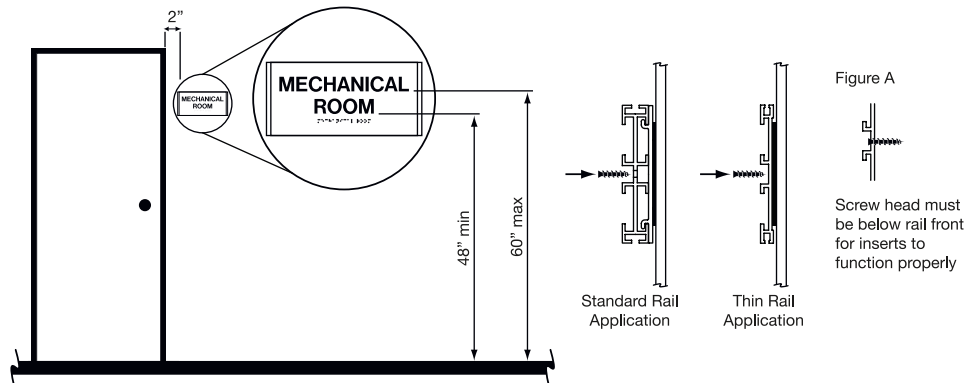

IMPORTANT: Prior to installation, remove all contents from box and inspect each sign for damage. Box should contain signs, hardware, and mounting instructions for each style of mount used. Surface of the sign must be handled with care. Bumpers are needed for proper function of end cap. Do not remove. Clean with water and mild detergent.

Customer is responsible for suitability of each mounting option. Testing is recommended prior to each use.

Rev. 1.2019