

Installation Instructions

Wall Mount - Adhesive (A-Mount)

Applicable for the following: Slide (Thin and Standard Profiles), Arc, Klik, Frame & Insert, Plaques, and PlaquesPlus.


This mount is intended for permanent mounting on smooth, hard surfaces such as glass, steel, dry wall, or plastic using silastic or polyurethane construction adhesive and double-sided foam tape. It is not to be used on vinyl wall coverings. Mounting surface must be clean and dry to ensure good adhesion. Recommended placement of signs are 60" maximum from finished floor to baseline of tactile text and 48" minimum from finished floor to baseline of tactile text and 2" from the door frame (latch side).

1. Apply a dollop of adhesive to back of sign at designated area exceeding the tape thickness.
2. Remove backing from tape.
3. Align sign for position, check for level, and then apply firm pressure for good adhesion.

Note: 2/90 recommends Loctite Power Grab Clear Construction Adhesive (Not supplied by 2/90).

If there are any questions, please contact our Technical Support Department at 800.777.4310.

Typical Applications:

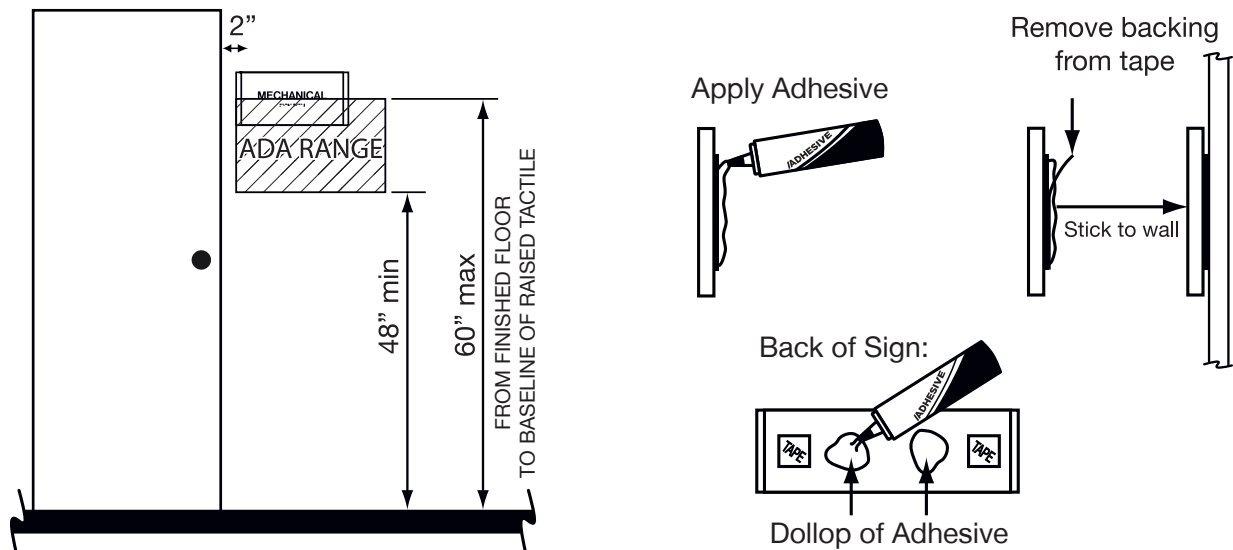

IMPORTANT: Prior to installation, remove all contents from box and inspect each sign for damage. Box should contain signs, hardware, and mounting instructions for each style of mount used. Surface of the sign must be handled with care. Clean with water and mild detergent.

Customer is responsible for suitability of each mounting option. Testing is recommended prior to each use.

Rev. 3.19